


BS 2670 MT 3~ 226

Pompe submersible transportable idéale pour les applications où le fluide peut contenir des concentrations importantes en particules abrasives.

Spécifications techniques



Courbes selon: Eau, claire Eau, claire [100%], 4 °C, 999,9 kg/m³, 1,569 mm²/s

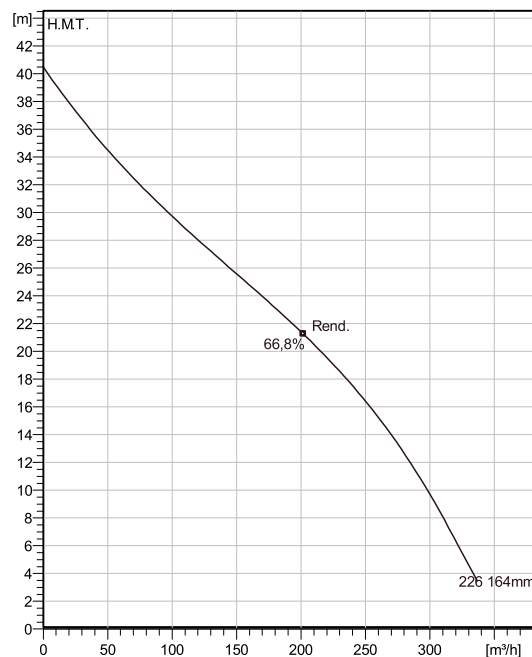

Nominal (mean) data shown. Under- and over-performance from this data should be expected due to standard manufacturing tolerances.
Please consult your local Flygt representative for performance guarantees.

Configuration

Code moteur B2670.181 21-18-2BB-W 18KW	Type d'Installation S - Installation immergée mobile sur socle
Diamètre roue 164 mm	Diamètre de refoult 150 mm

Info pompe


Diamètre de roue 164 mm
Discharge diameter 150 mm
Diamètre d'asp. 111 mm
Vitesse de fonct. Maxi 2895 rpm
Nombre de pales 3
Throughlet diameter 35 mm
Temp. de fluide max. 40 °C

Matériau

Roue Hard-Iron
Matériau de l'enveloppe moteur Aluminium

BS 2670 MT 3~ 226

Plan d'encombrement

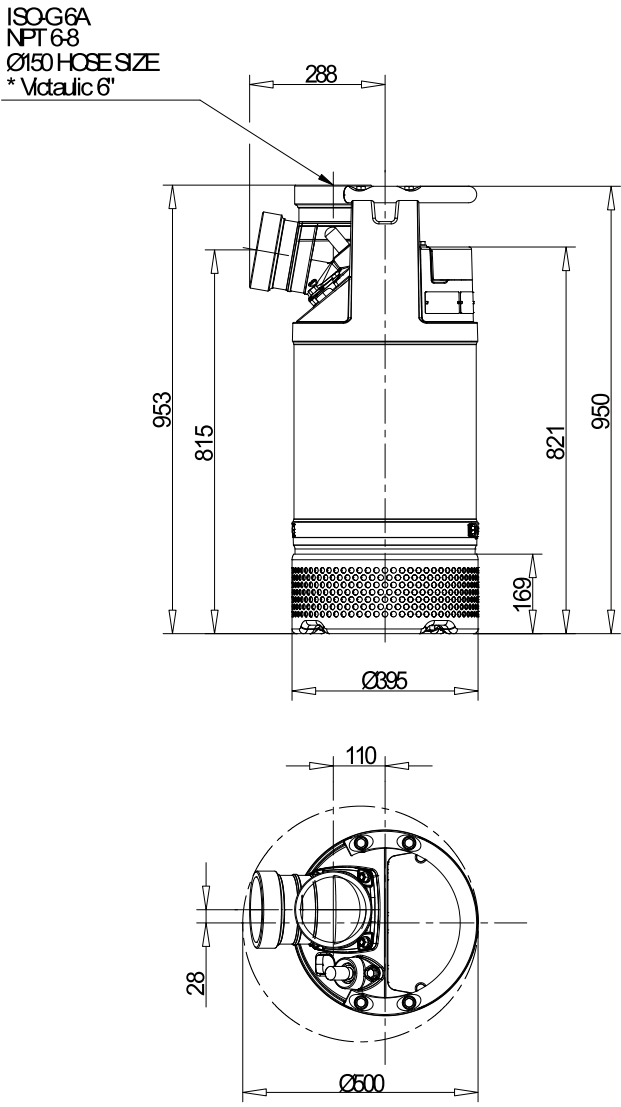

* Designed for "Victaulic Coupling",
according to ANSI/AWWA C606-97

SCREEN OPENING Ø12

				Discharge	ISO G6A	Sale	131
				Outlet		1:10	210507
				Pump outlet	DN 150	Drawing number	Revision
				Pump inlet		7807100	1
				Suction			
				Inlet			